



ART. 801

Flessibile in acciaio inox per miscelatori monocomando
M: 10x1 - F: 3/8 ,1/2

Flexible stainless steel single lever mixers M: 10x1 - F: 3/8, 1/2



ART. 802

Flessibile in acciaio inox per miscelatori monocomando
M: 10x1 prolungato - F: 3/8 ,1/2

*Flexible stainless steel
single lever mixers M: 10x1 prolonged - F: 3/8, 1/2*



ART. 804 FF

Flessibile in treccia inox 8 fili
con tubo interno in gomma alimentare EPDM

*Flexible braided stainless steel
wires with 8 inner tube rubber EPDM food*


Racc. 1/2f x 1/2f - 1/2f x 3/8f - 3/8f x 3/8f - 1/2f x 3/4f
Lunghezze cm. 20 - 25 - 30 - 35 - 40 - 45 - 50 - 60

ART. 806 FF

Come art. 804 FF

Treccia in lega di ALLUMINIO

Like art. 804 FF - Braid alloy ALUMINIUM

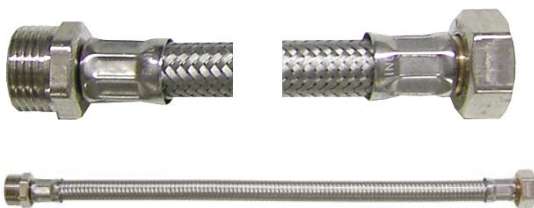

ART. 804 MF

Flessibile in treccia inox 8 fili
con tubo interno in gomma alimentare EPDM

*Flexible braided stainless steel
wires with 8 inner tube rubber EPDM food*

Racc. 1/2m x 1/2f - 1/2m x 3/8f - 3/8m x 1/2f - 3/8m x 3/8f
Lunghezze cm. 20 - 25 - 30 - 35 - 40 - 45 - 50 - 60

ART. 806 MF

Come art. 804 MF

Treccia in lega di ALLUMINIO

Like art. 804 MF - Braid alloy ALUMINIUM



ART. 808

Flessibile in treccia acciaio inox
con tubo interno in gomma alimentare EPDM
Flexible braided stainless steel inner tube rubber EPDM food
1/2 x 1/2 - 1/2 x 3/4 con curva
Lunghezze cm. 20 - 25 - 30 - 35 - 40 - 50



ART. 809

Flessibile in treccia acciaio inox
interno in gomma alimentare EPDM
Flexible braided stainless steel Food EPDM rubber inner
Racc. 3/8f x 3/8f - 1/2f x 1/2f - 3/8f x 1/2f
Lunghezze cm. 20 - 25 - 30 - 35 - 40 - 45 - 50 - 60



ART. 810 MF

Flessibile in treccia acciaio inox
interno in gomma alimentare EPDM maschio prolungato
Flexible braided stainless steel
Food EPDM rubber inner male extended
Racc. 1/2m x 1/2f - 1/2m x 3/8f - 3/8m x 1/2f - 3/8m x 3/8f
Lunghezze cm. 20 - 25 - 30 - 35 - 40 - 45 - 50 - 60 -
80 - 100 ecc..

ART. 812 MF

Come art. 810 MF
Treccia in lega di ALLUMINIO
Like art. 810 FM - Braid alloy ALUMINIUM

Linea FLEX

FDA



ART. 814

Flessibile in treccia acciaio inox interno in gomma alimentare EPDM. Racc. 1/2m oppure 1/2f e raccordo a compressione Ø 10 mm con maschio

Flexible braided stainless steel Food EPDM rubber inner Junction 1/2m or 1/2f and compression coupling Ø10 mm with male prolonged

Lunghezze cm. 20 - 25 - 30 - 35 - 40 - 45 - 50 - 60

ART. 816

Come art. 814

Treccia in lega di ALLUMINIO
Like art. 814 - Braid alloy ALUMINIUM



ART. 818


Flessibile in treccia acciaio inox gigante con tubo interno in gomma alimentare EPDM con o senza maschio prolungato
Flexible braided stainless steel giant inner tube rubber EPDM food with or without long male

Racc. 1/2 x 1/2 - 1/2 x 3/4 - 3/4 x 3/4 - mf oppure ff

ART. 820

Come art. 818

Treccia in lega di ALLUMINIO
Like art. 818 - Braid alloy ALUMINIUM

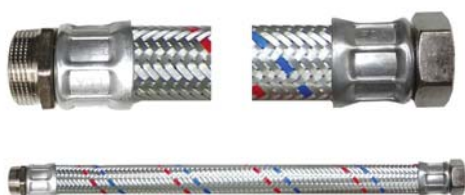

ART. 822 MF

Flessibile antivibrante per collegamento pompa Autoclave
Flexible anti vibration for connection Autoclaves pump

Racc. 1/2 - 3/4 - 1" - 1" 1/4 - 1" 1/2 - 2"

ART. 824 MF

Come art. 822 con curva in OTTONE

Like art. 822 with curve BRASS



ART. 960

Tubo carico lavatrice f/f 3/4
Tube loading washing machine f/f 3/4
lung. cm 150 - 200 - 250 - 300

ART. 962

Tubo carico lavatrice con curva f/f 3/4
Tube loading washing machine with curve f / f 3/4
lung. cm 150 - 200 - 250 - 300



ART. 964

Tubo carico lavatrice in acciaio inox f/f 3/4
con o senza curva
Tube loading washing machine stainless steel f / f 3/4
with or without curve
lung. cm 150 - 200 - 250 - 300 - ecc.



ART. 966

Tubo corrugato scarico lavatrice
Corrugated tube exhaust washing machine
lung. cm 150 - 200 - 250 - 300

